


**PLAN VIEW**


N.T.S.

**GENERAL NOTES:**

- 1 ADJUST THE POSITION OF THE LAST JOINT IMMEDIATELY PREVIOUS TO THE FIXED LOCATION JOINT, SO THAT THE SLABS ON EACH SIDE OF THIS LAST JOINT ARE NOT SHORTER THAN 3.0m, NOR LONGER THAN 5.0m. LAST JOINT TO BE AN EXPANSION JOINT FOR TYPE B SECTION.
- A WHEN BASE IS OPEN GRADED DRAINAGE LAYER, A MINIMUM 100mm OF GRANULAR A MATERIAL IS REQUIRED BENEATH IT.
- B ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

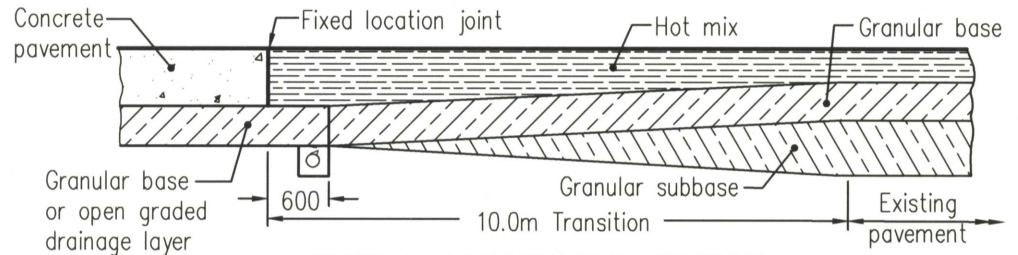

**TYPE A: LONGITUDINAL SECTION  
CONCRETE PAVEMENT TO HOT MIX PAVEMENT WITH GRANULAR BASE**

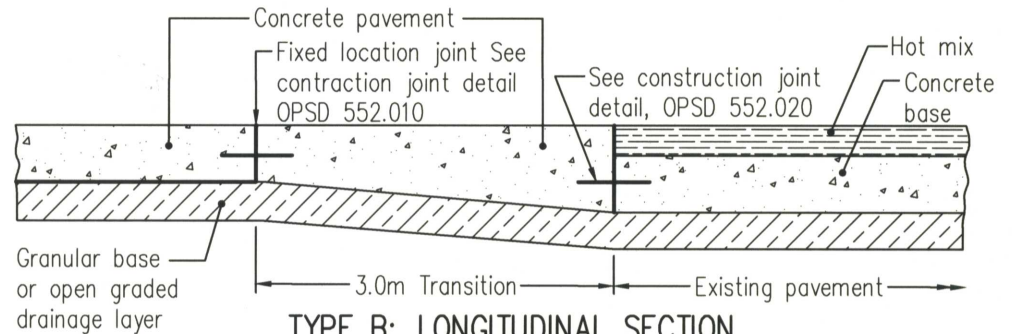

**TYPE B: LONGITUDINAL SECTION  
CONCRETE PAVEMENT TO COMPOSITE PAVEMENT**

**CITY OF WINDSOR**

ENGINEERING DEPARTMENT

**CONCRETE PAVEMENT  
APPROACH TREATMENT TO HOT MIX AND  
COMPOSITE PAVEMENTS**

DR'N BY: J.L./S.R.

DATE: APRIL, 2014

REVISION: FEB, 2015

CH'KD BY: A.L.

CH'KD BY: P.J.U.

PASSED BY:

*[Signature]*  
CITY ENGINEER

**AS-554-A**