


DETAIL A – SUBDRAIN FOR ASPHALT PAVEMENT

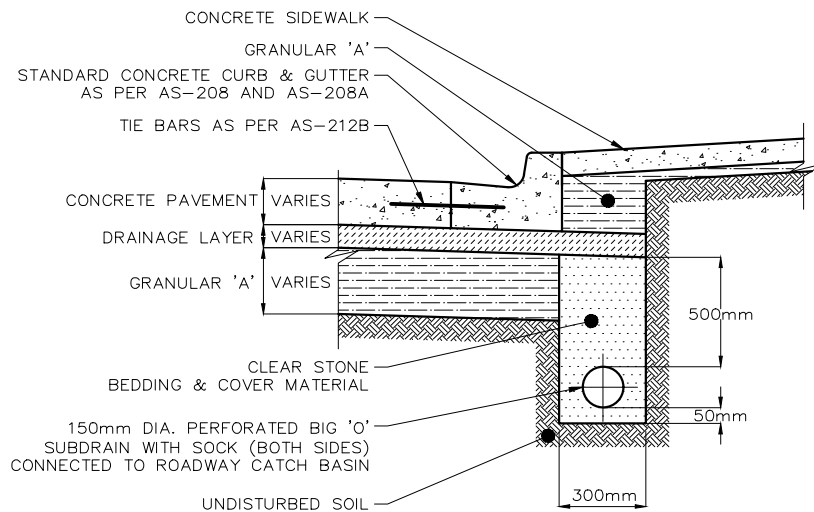


DETAIL B – SUBDRAIN FOR CONCRETE PAVEMENT

NOTES:

1. TO BE READ IN CONJUNCTION WITH CITY OF WINDSOR STANDARD SPECIFICATIONS S-16.
2. CLEAR STONE MAY BE 16mm OR 19mm. REFER TO CITY OF WINDSOR STANDARD SPECIFICATION S-4.
3. DEPTH OF SUBDRAIN SHALL FOLLOW LONGITUDINAL PROFILE OF THE ROAD.
4. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

NOT TO SCALE

 CITY OF WINDSOR ENGINEERING DEPARTMENT	
SUBDRAIN DETAIL FOR ASPHALT & CONCRETE PAVEMENT	
DR'N BY: BC, AZ	DATE: JUN, 2015
REV. DATE: DEC, 2024	CH'KD BY(ENG): PM, JH
CH'KD BY(GEO/OPS): PJU, AL	PASSED BY: FM
<i>David Simpson</i> CITY ENGINEER	
AS-557	