
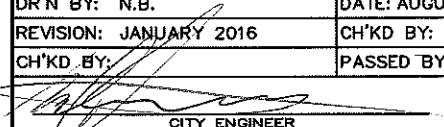


GENERAL NOTES:

1. MATERIAL TO BE 12.7mm (½") UNCOATED STEEL PLATING;
2. STEEL SUPPORT PLATE TO ONLY BE USED ON BRICK MANHOLES WHEN THE INSIDE DIAMETER OF THE BRICK CHIMNEY IS GREATER THAN 29 INCHES (725mm).
3. ONE PRECAST CONCRETE RISER RING (HEIGHT VARIES) SHALL BE USED WHEN INSIDE DIMENSION IS LESS THAN 29 INCHES (725mm).
4. IN EITHER ABOVE SITUATION, THE EXISTING BRICKS SHALL BE REMOVED TO A DEPTH TO INSTALL A MINIMUM OF 2 (TWO) POLYETHYLENE RISER RINGS.

 CITY OF WINDSOR ENGINEERING DEPARTMENT	
MANHOLE SUPPORT PLATE FOR BRICK MANHOLE LEVELLING	
DR'N BY: N.B.	DATE: AUGUST 2015
REVISION: JANUARY 2016	CH'KD BY: P.U.
CH'KD BY: 	PASSED BY: A.L.
CITY ENGINEER	AS-558