


How do I load my bike?

1. Remove any loose items from your bike that could fall off.
2. Let the transit operator know that you will be loading your bike while standing in a safe area away from oncoming traffic.
3. Squeeze the top latch handle to fold the bike rack down.
4. Lift your bike onto the bike rack, fitting your front wheel into a wheel slot labeled for a front wheel.
5. Raise the Support Arm Hook over the front tire. This will keep the bike secure while the transit vehicle is in motion. **The Support Arm Hook must be between the highest point of the tire and the head tube.**

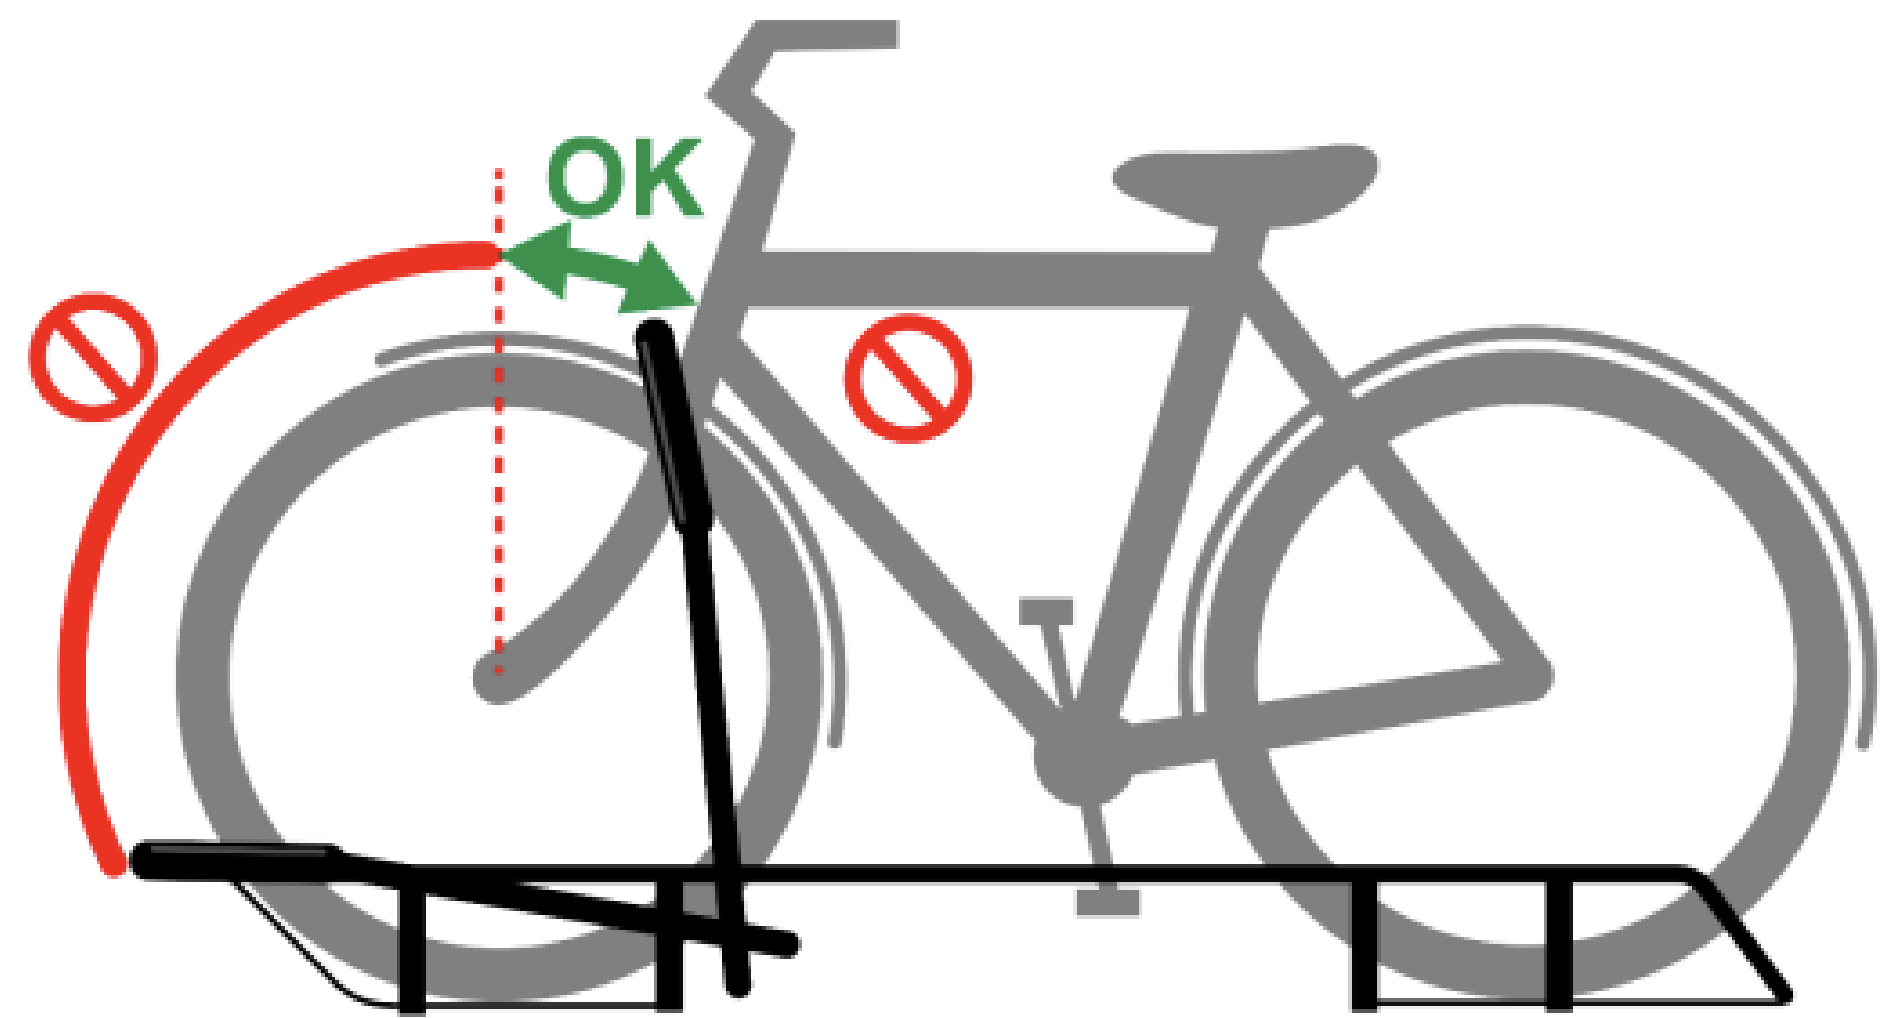

To remove your bike follow the loading steps in reverse.

What types of bikes are compatible?

Compatible with **e-bikes** that meet these requirements.

